


Tripping Parameters:


Under Current

Over Current

Dimension:

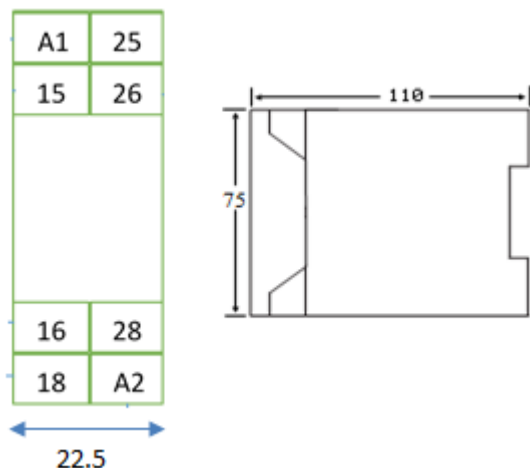

Terminal Connection:

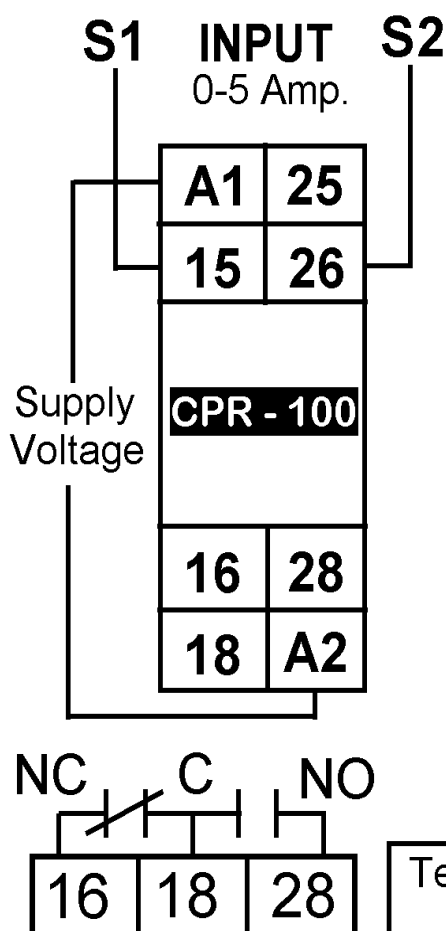

Power Supply:

230VAC $\pm 20\%$, 50Hz

INPUT Current:

300mA to 5Amp. AC

OUTPUT:

1-Relay, 1C/O,
5A, 230VAC (Res.)

Tripping Parameters:

Under Current

Over Current

Delay Time:

Power ON: 5 Sec.

Initial Delay: 5 Sec.

Trip Delay: 5 Sec.

Recovery Time: 5 Sec.

Terminal S1 & S2 is for
Input Current