


Technical Specification:

Model	RC 9611	RC 7211	RC 4811
Size(HxWxD)	96 X 96 X 50 mm	72 X 72 X 85 mm	48 X48 X 95 mm
Panel Cut-out	92 X 92 mm	68x68 mm	44x44 mm
Display	UPPER:- 4 Digit 7 seg 0.56",Red LED Display LOWER:- 4 Digit 7 seg 0.40",Green LED Display		
Input	NPN/PNP Proximity & Micro Switch		
Output	1 Relay,230V AC, 5A ,		
Supply	230V AC, 50 / 60 Hz, Approx. 4VA		
Protection Level	IP-65(Front side) AS per IS/IEC 60529:2001		
Operating Temperature	0°C To 55°C	Relative Humidity	Up to 95% RH Non Condensing

Key Operations:

- Press **SET** Key to enter in programming mode.
- Press **SET** Key to go to next parameter.
- Use **UP (↑) Or SHIFT (←)** Key to change value of parameter. [**SHIFT (←)** key to go to next digit for changing value of the digit & **UP (↑)** key increases value of individual digit.]

Parameter Menu:

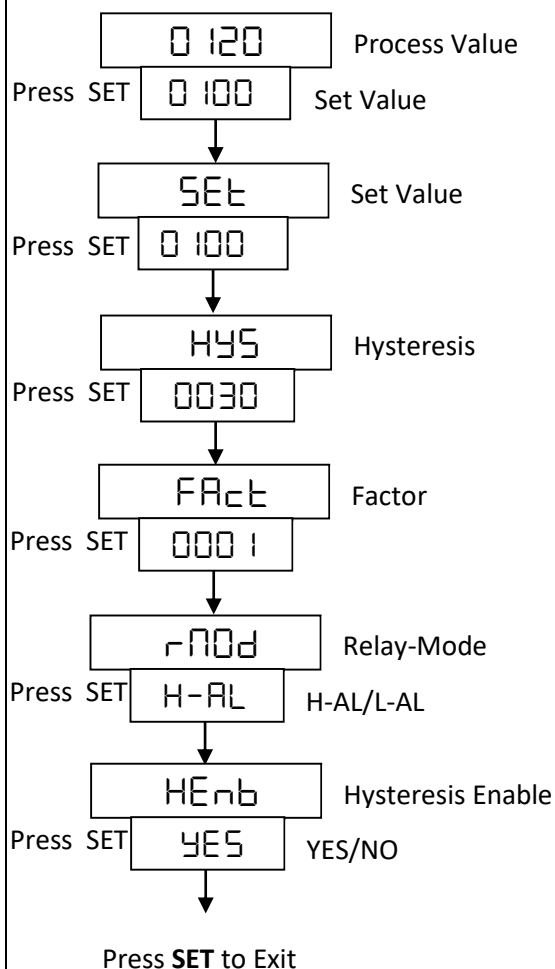

IF Hysteresis Enable=YES (Auto Mode)

Low Alarm Mode:

Initially Relay will be on condition. When Process value equals to Set Point Relay will turn off. When Process value equal to Set Point- Hysteresis then again Relay will be on.

High Alarm Mode:

Initially Relay will be off condition. When Process value equals to Set Point Relay will turn on. When Process value equal to Set Point- Hysteresis then again Relay will turn off.

IF Hysteresis Enable=NO (Manual Mode)

Low Alarm Mode:

Initially Relay will be on condition. When Process value equals to Set Point Relay will turn off. (**Press RST** Key 5 sec. for Reset)

High Alarm Mode:

Initially Relay will be off condition. When Process value equals to Set Point Relay will turn on. (**Press RST** Key 5 sec. for Reset)