

OPERATING MANUAL
UNIVERSAL TEMPERATURE INDICATOR
UTI-2000/2000A

MISTURA


Technical Specification:

Display	4 Digit Seven Segment , 2.0"(UTI-2000)Red LED Display		
Size (mm)	173(H)x400(W)x60(D)		
Input	TC-J(0°C to 600°C,TC-K (0°C -1200°C),PT(-100°C to 400°C),PT.1(-100.0°C to 400.0°C)		
Supply	100 to 250V AC, 50 / 60 Hz, Approx. 4VA		
Protection Level	IP-65(Front side) AS per IS/IEC 60529:2001		
Operating Temperature	0°C To 55°C	Relative Humidity	Up to 95% RH Non Condensing

Key Operations:

- Press **SET** Key to enter in programming mode.
- Press **SET** Key to go to next parameter.
- Use **Up Or Down** key to change value of parameter.
- Press **ENT** Key to save change in setting

Parameter Menu:

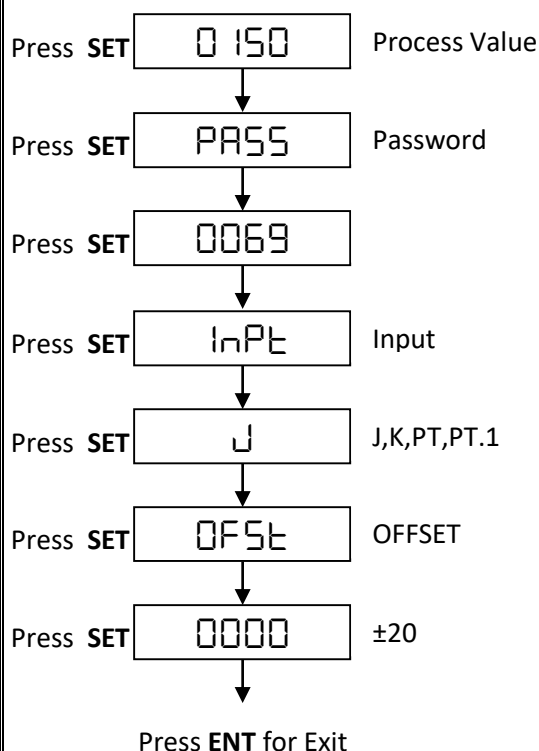

NOTE:

- 1)1 Relay / 2 Relay (Optional)
 - 2)24 VDC SSR @30mA (Optional)
- available as per requirement.