

Technical Specification:


Model	UTR 9612	UTR 7212	UTR 4812
Size (HxWxD)	96 X 96 X 50 mm	72 X 72 X 85 mm	48 X 48 X 70 mm
Panel Cut-out	92 X 92 mm	68x68 mm	44x44 mm
Display	UPPER: 4 Digit 7 segment 0.56",Red LED LOWER:4 Digit 7 segment 0.40",Green LED		UPPER: 4 Digit 7 segment 0.39",Red LED LOWER: 4 Digit 7 segment 0.32",Green LED
Input	NPN/PNP Proximity & Micro Switch		
Output	2 Relay (230V AC, 5A)		
Supply	230V AC, 50 / 60 Hz, Approx. 4VA		
Protection Level	IP-65(Front side) AS per IS/IEC 60529:2001		
Operating Temperature	0°C To 55°C	Relative Humidity	Up to 95% RH Non Condensing

Key Operations:

- Press **SET** Key to enter in programming mode.
- Press **SET** Key to go to next parameter.
- Use **UP (↑) Or SHIFT (←)** Key to change value of parameter. [**SHIFT (←)** key to go to next digit for changing value of the digit & **UP (↑)** key increases value of individual digit.]
- Press **RST** Key to reset the Timer.

Operating Mode:


To Enter Operating Mode Press **SET KEY+POWER On**

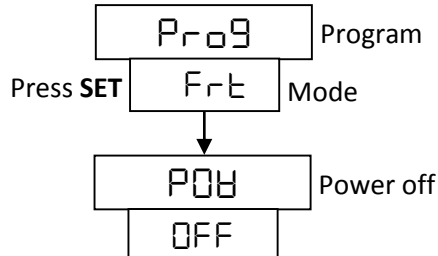


Frt	Forward Reverse Timer
Seq	Sequential Timer
Cyl	Cyclic Timer
Comb	Combination Timer

FRT (Forward Reverse Timer):


Forward Time(FRTM)=10 sec
 Stop Time(STTM)=5 sec
 Reverse Time(RVTM)=10 sec

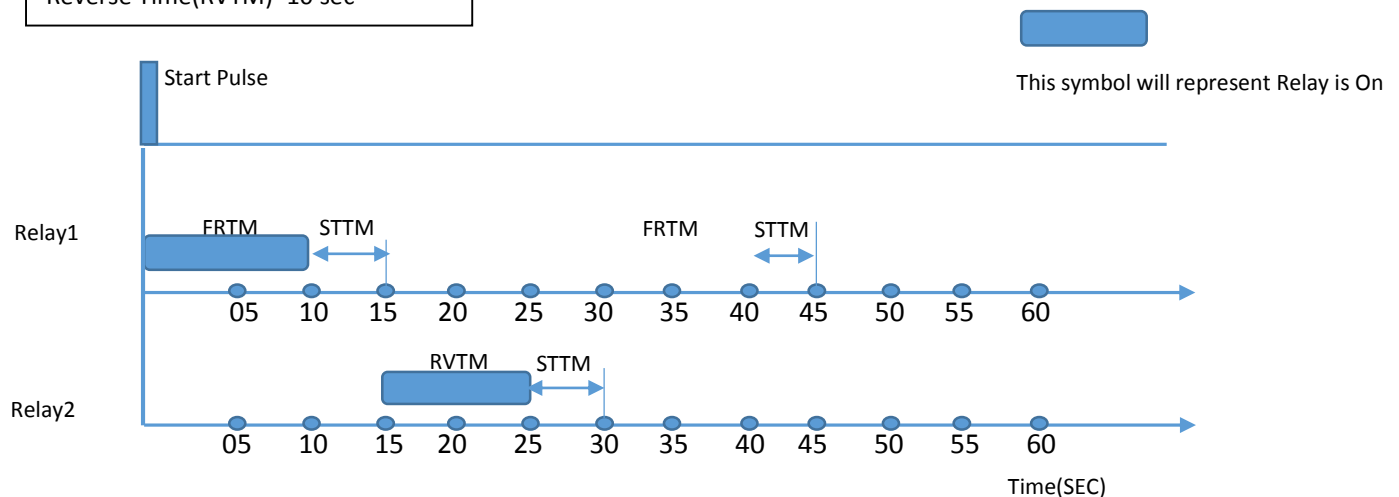


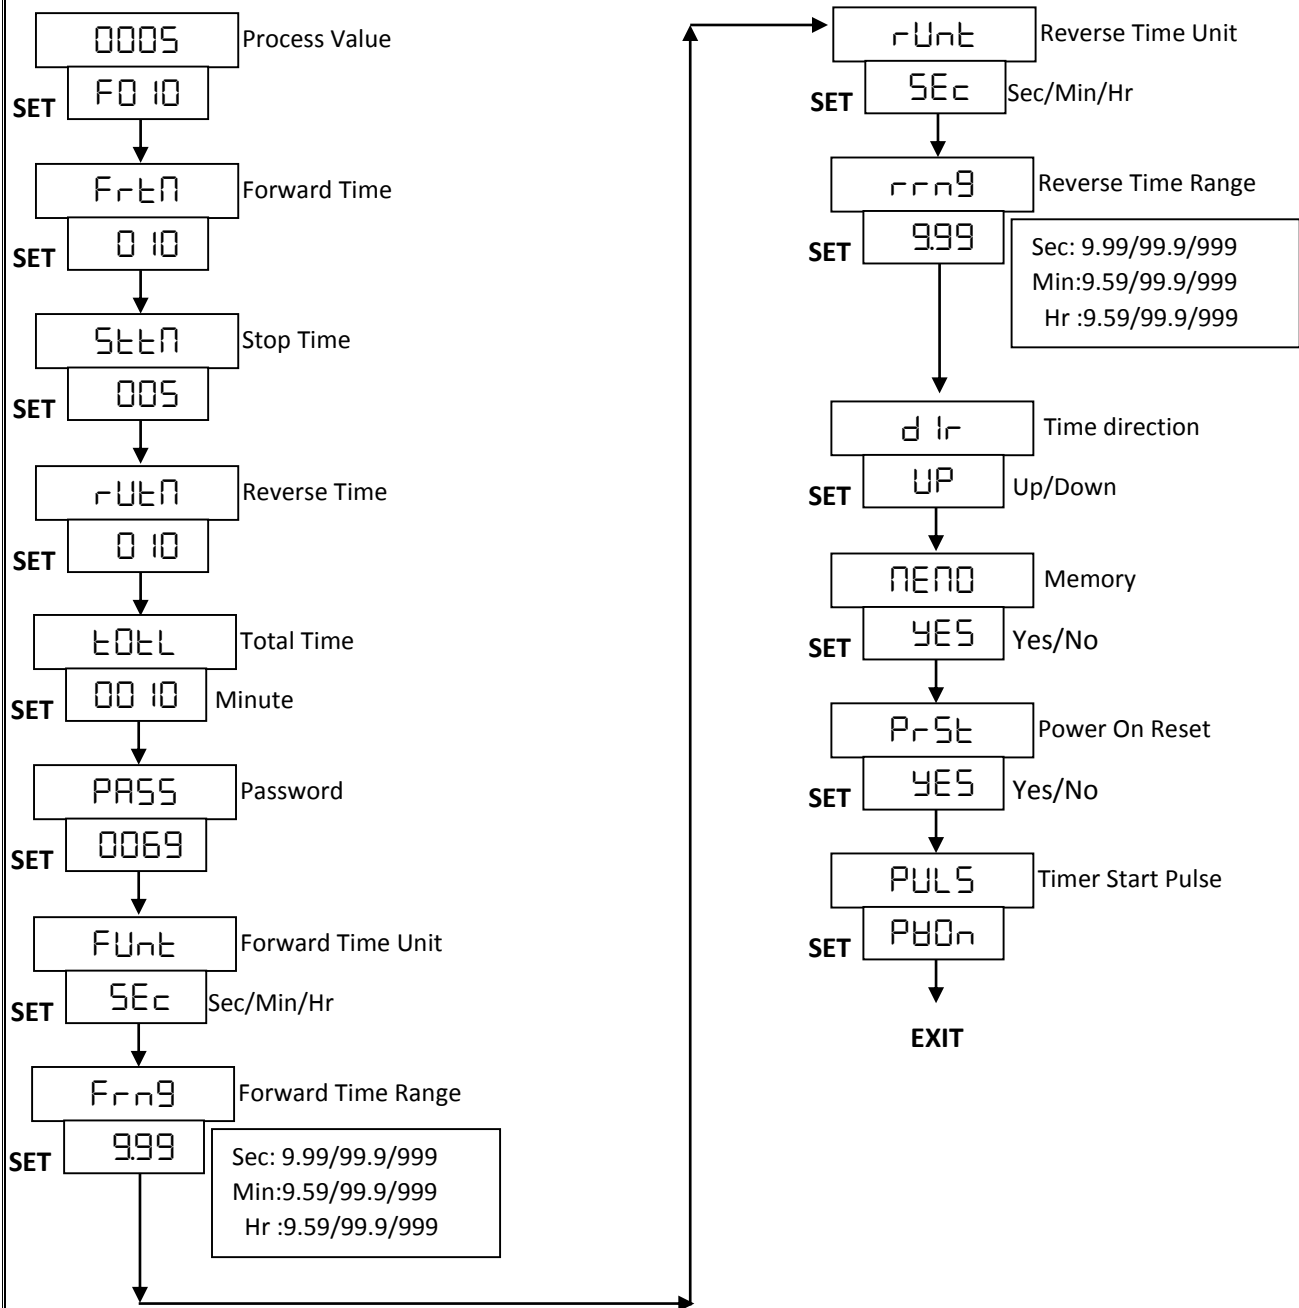

SEQ (Sequential Timer):


SEQUENTIAL TIMER			
RELAY-1		RELAY-2	
DL1	5	DL2	10
ON1	10	ON2	10
OF1	10	OF2	10


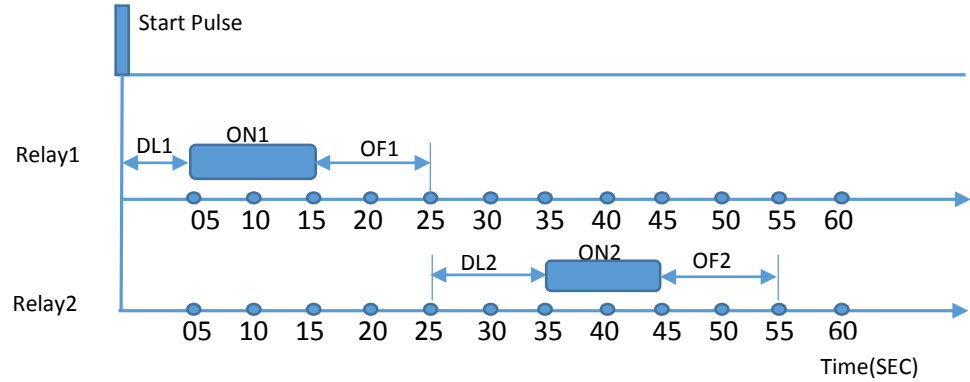


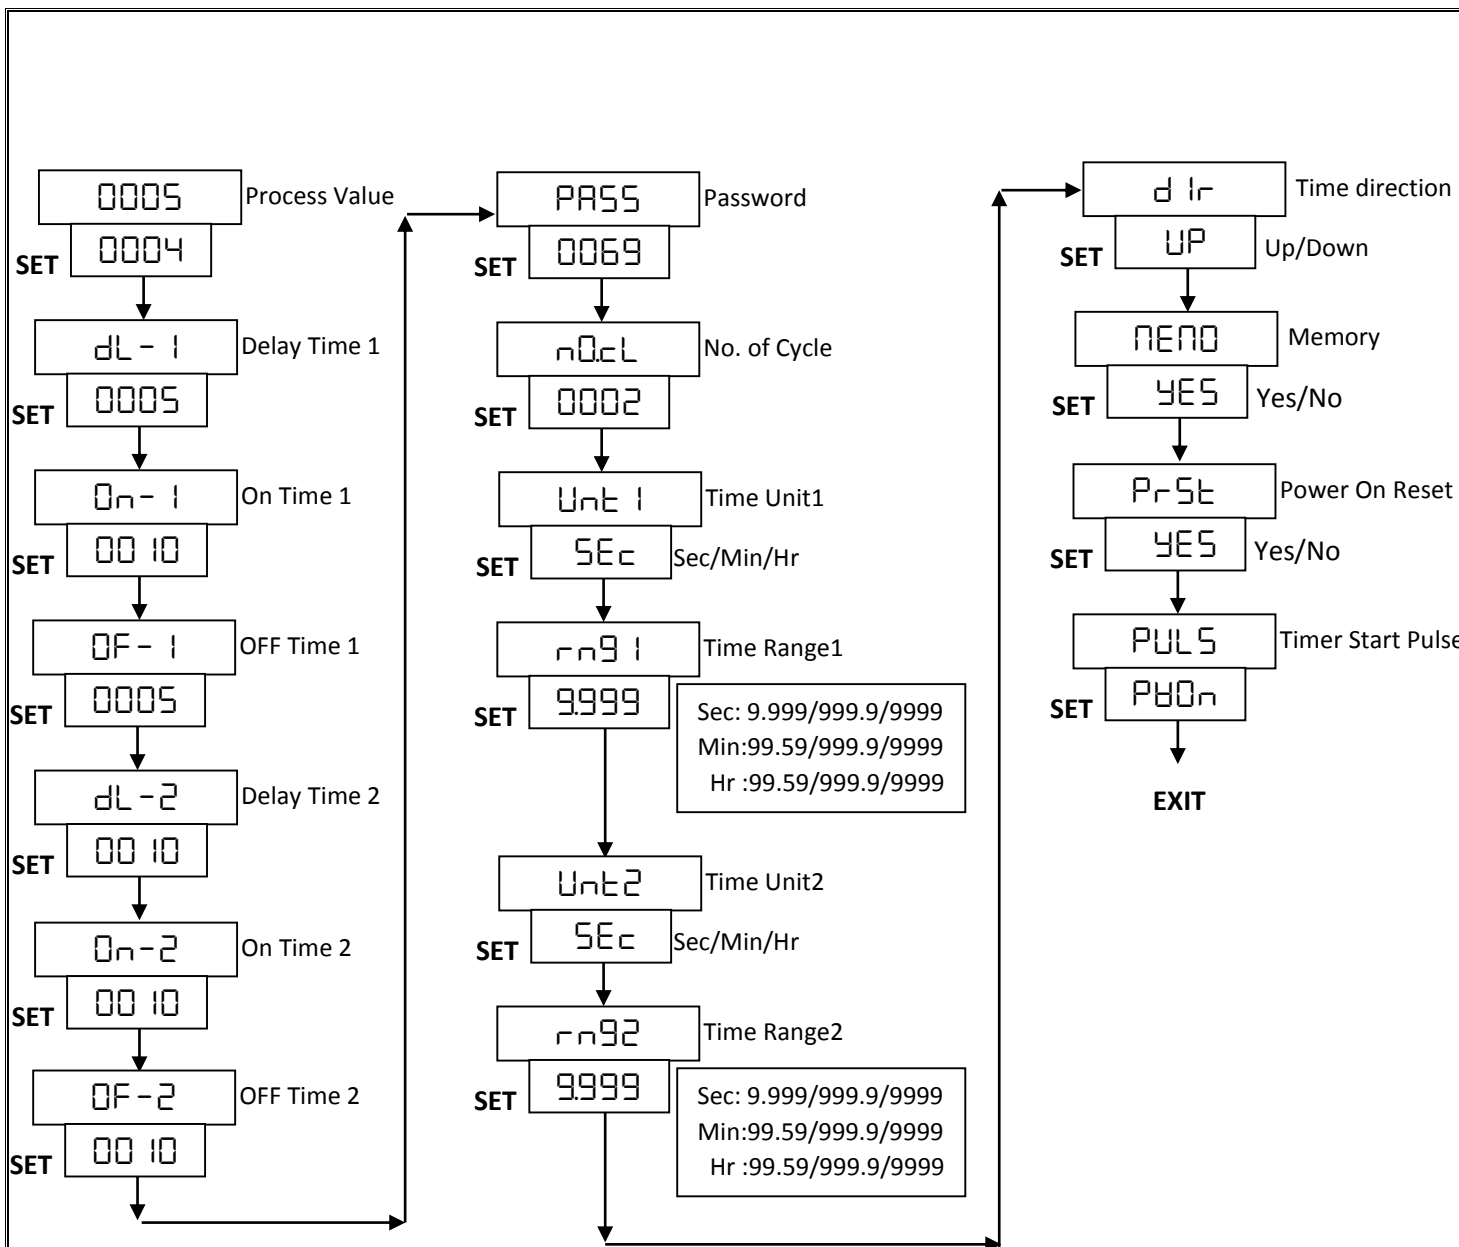

CYL (Cyclic Timer Timer):

On Time(ONTM)=15 sec
OFF Time(OFTM)=10 sec

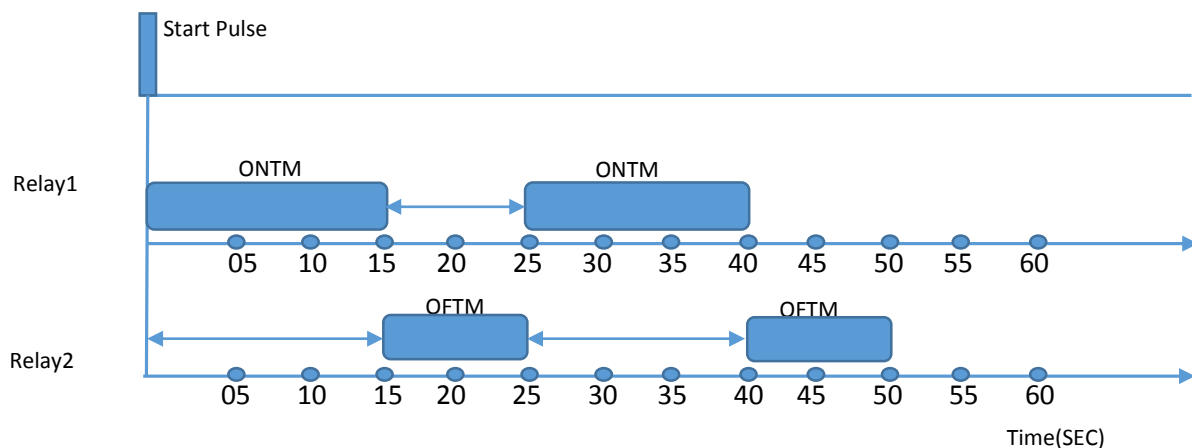

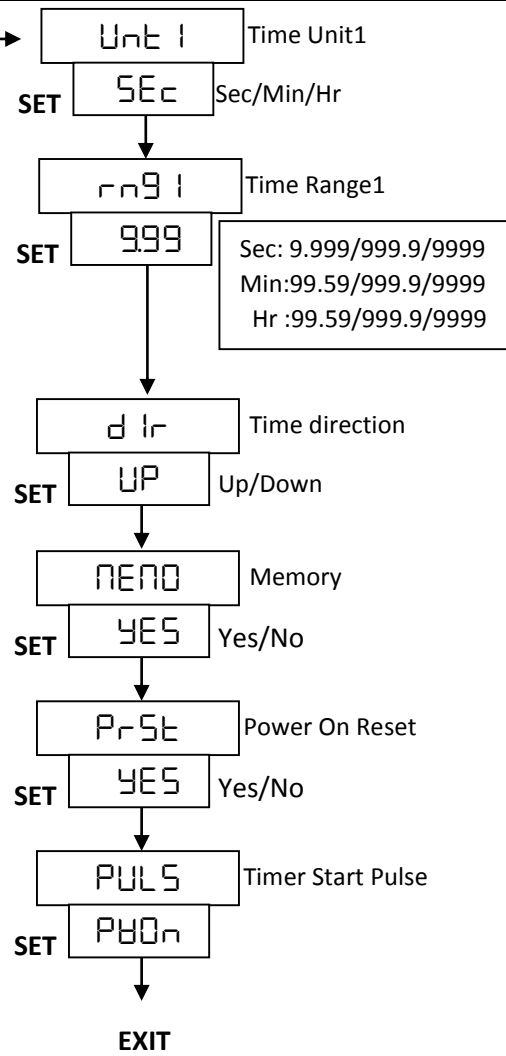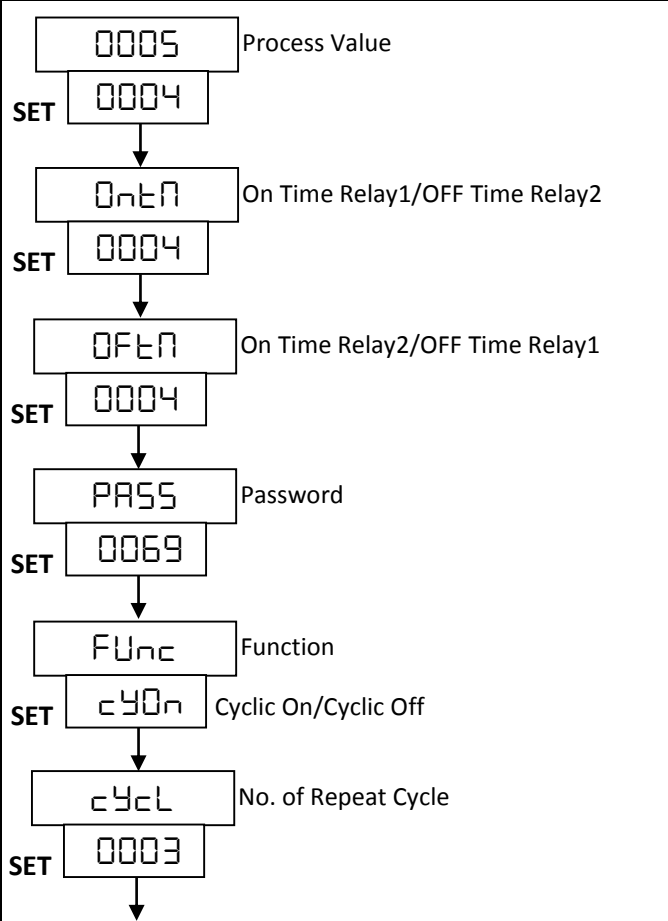

COMB (Combination Timer):

